

Single Directional Vibratory Plates

BP10/36-2, BP18/45-2




MODEL	Compaction Output (cu. yd/h) at recommended soil layer thickness.*		
	Gravel, Sand	Mixed Soils	Silt, Clay
BP10/36-2	14.4 - 20.9	14.4 - 20.9	—
BP18/45-2	22.2 - 30.1	18.3 - 26.2	—

MODEL	Compaction Output (t/h) at different asphalt layer thickness.*		
	1 in.	2 in.	3 in.
BP10/36-2	5.5	9.9	14.3
BP18/45-2	6.6	11.6	16.5

* Compaction output influenced by soil/material type and moisture content.



BP10/36-2, BP18/45-2

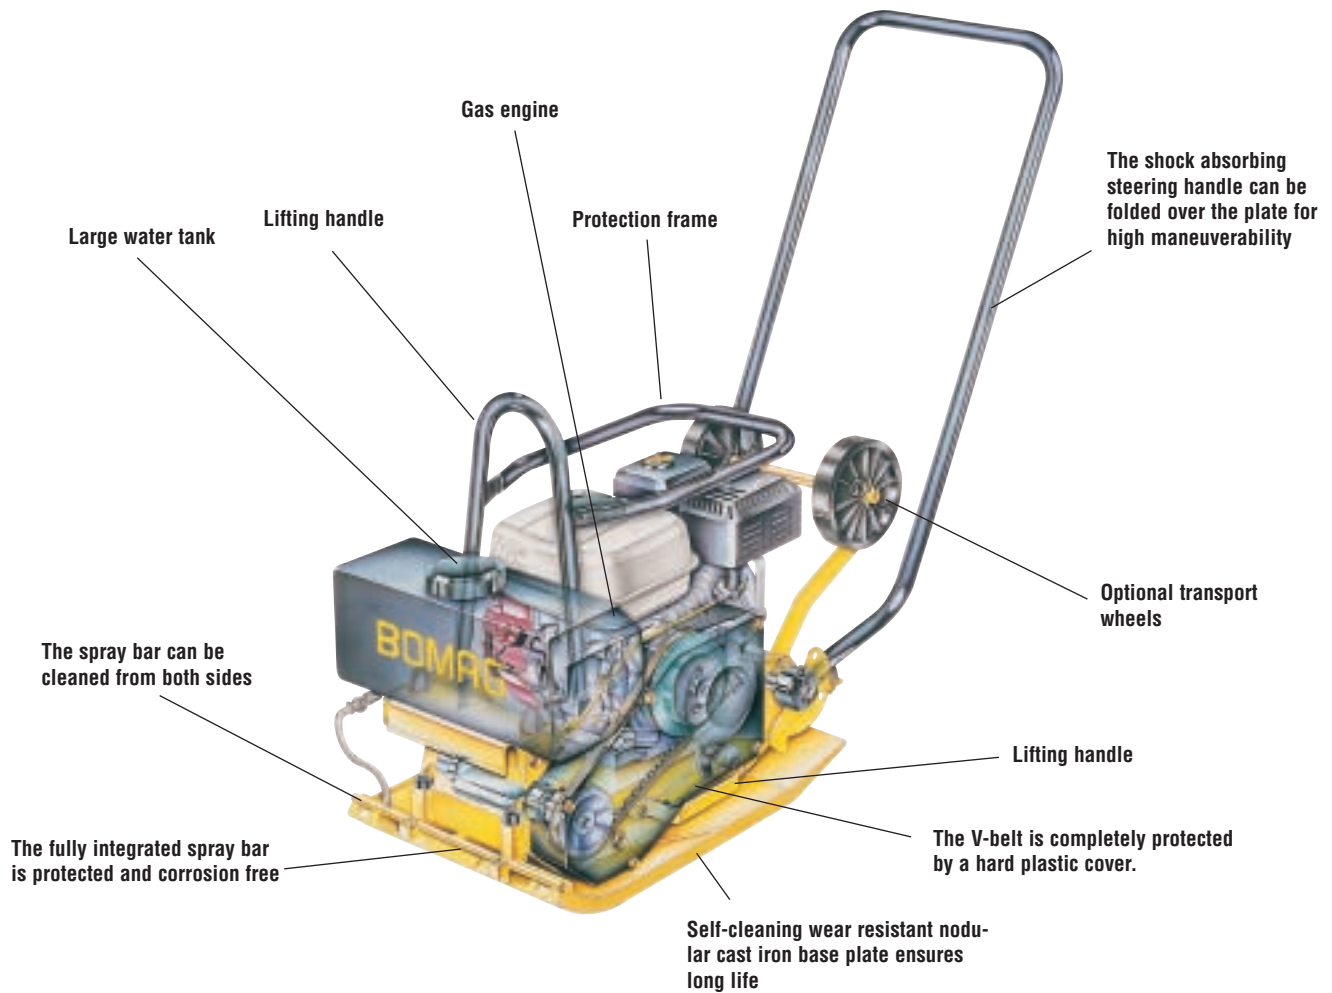

■ *Featuring a range of plates and options to suit all your light compaction needs...*

The Bomag range of single direction vibratory plates are designed to meet the needs of today's contractors. Suitable for use on granular soils and bituminous materials as well as paving blocks, the BP10/36-2 and BP18/45-2 plates feature a shock-absorbing handle to minimize vibration feedback and maximize productivity. The long, thick base plates with extended radius provide enhanced stability and better compaction along walls or curbs. These features combined with the compact design, excellent maneuverability, reliability and ease of operation make these plate compactors the ideal choices for a variety of confined space and light duty projects.

■ Applications:

- Trench applications
- Road construction
- Backfill and foundation work



Excellent performance on granular materials

Featuring...



Compacting paving blocks with vulcolan mat

■ Handling is Easier & Safer:

- The shock-absorbing steering handle minimizes harmful vibration feedback to the operator, reducing fatigue.
- Loading and positioning is easy using the central lifting point of the engine protective cage.
- The engine protective cage reduces damage at the job-site and during transport.
- A weather resistant operating instruction decal informs inexperienced operator's of the best method for proper operation.
- The optional transport wheels allow for one-man movement around the job-site.




The water tank is fixed without screws for quick and easy removal

Advanced design provides enhanced stability and maneuverability

■ Achieve Maximum Productivity:

- The self-cleaning design of the base plate reduces the possibility of material build-up on the plate surface.
- The edges of the base plate are designed to prevent surface marking, particularly when used on asphalt applications.
- The optional water spray system constructed of non-corrosive materials, has the tank specially mounted to the engine protective frame providing for quick removal and installation.
- The optional vulcolan mat and water spray system provide for increased application versatility.
- When used for the compaction of paving block, the optional vulcolan mat reduces material damage.

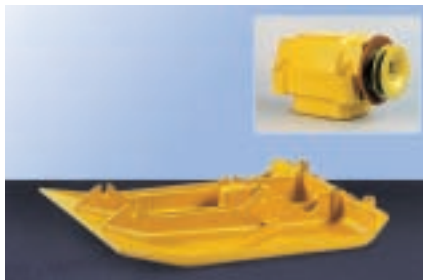

The exciter is oil lubricated and the housing is fully sealed.

■ Less Service & Maintenance:

- The bolt-on exciter mechanism is oil lubricated, totally sealed and maintenance free.
- The fully enclosed V-belt drive system ensures long life and trouble-free operation even under the most extreme conditions.
- Routine maintenance is eliminated with the exception of periodic engine oil change and cleaning of the engine air filter as-required.
- The exciter assembly bearings are maintenance free.
- The exciter drive system incorporates a simple centrifugal clutch for reliability and long life.



Quick-fit vulcolan mat



Operating decal illustrates proper operation methods

With these features and many more, it's easy to see why these models maintain a high residual value while delivering lower lifetime operating costs.


Technical Specifications

BP10/36-2, BP18/45-2

Shipping dimensions

in cubic feet (m³)

BP 10/36-2	7.24	(0.205)
BP 18/45-2	9.04	(0.256)

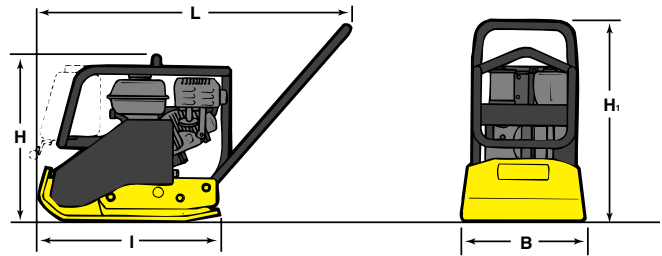

Standard Equipment

- Honda engine with oil alert
- Removable, vibration isolated steering handle
- Wear resistant base plate with reinforced sides
- Engine protection frame
- Balanced lifting point
- Centrifugal clutch
- Fully enclosed V-belt
- Lifetime lubricated vibration bearings
- Vibration isolated engine
- Self-cleaning base plate

Optional Equipment

- Water sprinkler system
- Transport wheels
- Vulcolan mat

Dimensions in inches (mm)

	H	H ₁	L	I	B
BP 10/36-2	21.1 (535)	36.0 (915)	43.9 (1115)	22.0 (558)	14.2 (360)
BP 18/45-2	21.1 (535)	36.0 (915)	43.9 (1115)	22.0 (558)	17.7 (450)

Technical data

Weights

		BOMAG BP 10/36-2	BOMAG BP 18/45-2
Basic Weight	lbs (kg)	145 (66)	195 (89)
Operating Weight	lbs (kg)	150 (68)	200 (91)
Surface load	lb/in ² (kg/m ²)	0.81 (572)	0.89 (624)

Dimensions

Dimensions	BOMAG BP 10/36-2	BOMAG BP 18/45-2
Dimensions	see sketch	see sketch

Driving Characteristics (depending on site conditions)

	BOMAG BP 10/36-2	BOMAG BP 18/45-2
Working speed max.	82.0 (25) ft / min (m / min)	82.0 (25)
Max. gradeability	30 %	30

Drive

	BOMAG BP 10/36-2	BOMAG BP 18/45-2
Engine manufacturer	Honda	Honda
Type	GX 120	GX 160
Cooling	Air	Air
Number of cylinders	1	1
Performance ISO 9249	4.0 (3.0) hp (kW)	5.5 (4.1)
Speed	3600 rpm	3600
Performance SAE	4.0 (3.0) hp (kW)	5.5 (4.1)
Speed	3600 rpm	3600
Drive system	mechanical	mechanical
Fuel	gasoline	gasoline

Vibratory system

	BOMAG BP 10/36-2	BOMAG BP 18/45-2
Frequency	5400 (90) vpm (Hz)	5400 (90)
Centrifugal force	2250 (10) lbs (kN)	4050 (18)

Capacities

	BOMAG BP 10/36-2	BOMAG BP 18/45-2
Fuel	0.66 (2.5) gal (l)	0.98 (3.7)
Water	2.6 (10) gal (l)	2.6 (10)

Technical modifications reserved. Machines may be shown with options.

B100H-2191 2M508TTTT